

“The Complete Faucet Hose Kit”

Installation Instructions for the Spelt Sprinklers Hanging Basket Water Valve or (H.B.W.V)



Worry Free Watering

- An excellent kit for Do-It-Yourselfers,
- This kit comes complete to install from 1 to 5 Hanging Baskets
- The system can be expanded easily and only requires a water supply.


Kit contents:

1 - 150 mesh in-line filter	3 - 1/2" tubing elbows
1 - 25psi in-line “Static” pressure regulator	10 - 1/2" tubing straps
1 - 3/4" FHT x 1/2" ,MPT pipe to hose thread swivel	1 - 1/2" tubing end cap
1 - roll Teflon Tape	5 - 1/4" tubing couplings
1 - 1/2" FPT to 1/2" hose adapter	1 - hole punch
50' - 1/2" distribution tubing	10' - 1/4" feeder tubing


Tools required are:

- | | |
|---------------|----------|
| - Hose cutter | - Hammer |
|---------------|----------|


Follow these easy steps to create a plant enhancing, water conserving and time saving system:




1 Attach “In-line filter” to an outside faucet (hand tight only)




4 Wrap Teflon tape onto threads of the adapter, then thread the pipe to hose adapter (hand tight only)



2 Thread “static pressure regulator” to the “in-line filter” (hand tight only)

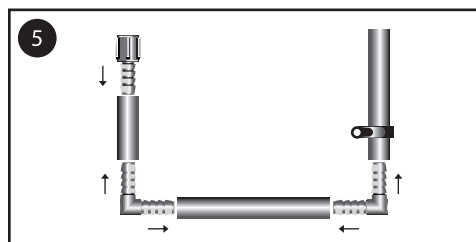

5 Unroll the 1/2" distribution hose and attach it along the wall, starting at the assembled fittings




3 Thread 3/4" to 1/2" “swivel adapter” to the “pressure regulator” (hand tight only)


(don't attach to the fittings yet). Continue under the roof overhang to the desired location, using supplied hose straps where necessary, cut the hose at the desired length. * Now attach the hose to the fitting at the faucet (use supplied 1/2" elbows if sharp turns or curves are required).

* try to keep the 1/2" hose hidden from sight and sunshine where possible


INSTALLATION INSTRUCTIONS cont.

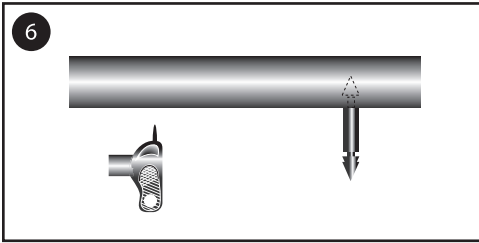


Using the supplied hole punch, punch holes then insert $\frac{1}{4}$ " couplings in the bottom of the $\frac{1}{2}$ " hose near each basket location.




Cut the $\frac{1}{4}$ " feeder tubing to the desired length being sure to allow for a gentle curve to the HBWV so as not to pull the valve crooked, then press onto the coupler close to each basket (DO NOT attach to HBWV yet).

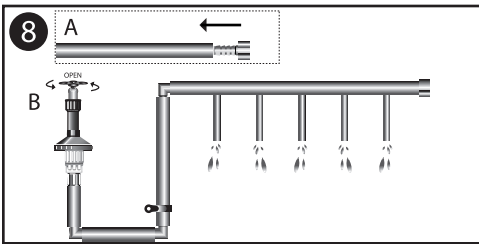


Insert the plug into the end of the $\frac{1}{2}$ " hose. Turn on the water to flush the system for one minute. Then turn off the water



Attach the basket to the HBWV making sure that the basket hangs level. Then hang HBWV and basket on to your roof hook.



Attach the hose to the HBWV, then turn on the water faucet.



To adjust:
- Turn bottom adjusting drain cap clockwise until the watering starts and the desired water is present in the basket,
- Check and adjust (if required) for 2 more watering cycles, Then enjoy "Worry Free Watering!"

If you have any questions regarding these instructions or any other concerns regarding this system please contact us at any of the following:



Worry Free Watering

Spelt Sprinklers:
7856C East Saanich Road
Saanichton B.C. Canada
V8M 2B3
Ph/Fx: 250-652-5069
E-mail: sales@speltsprinklers.com
Web: www.speltsprinklers.com